

# DS130001

~ 10bit color LVDS Signal Generator ~



## Equipment specification

Item	Detail
Operating temperature range	0 - 40 °C
Storage temperature range	0 - 60 °C
Operating humidity range	20 - 80 % RH (Non-condensing)
Input supply voltage	AC85 - 220V
Power frequency	50 / 60Hz
Body Dimensions	305(W) × 221(D) × 63(H) (does not include protrusions)
Weight	about 2.8 kg
Power consumption	Max. 150W
Dot Clock Frequency	Single clock 20MHz - 135.0MHz Dual clock 20MHz - 170.0MHz Quad clock 20MHz - 170.0MHz
Output Signals	LVDS 10 bit output Single / Dual / Quad
Output Voltage	VLCD 2.0V - 13.0V (max. 5A variable) VID 3.3V or 5V (max. 3A) AUX 12.0V (max. 2A)
Resolution	Max. 2560 × 1080

I.S.X Corporation

〒532-0033

5-8-20, Niitaka,  
Yodogawa-Ku, Osaka,  
Japan

TEL 06-4807-6636




FAX 06-4807-6669

sales@isx.co.jp

I.S.X

# DS130001

~ 10bit color LVDS Signal Generator ~

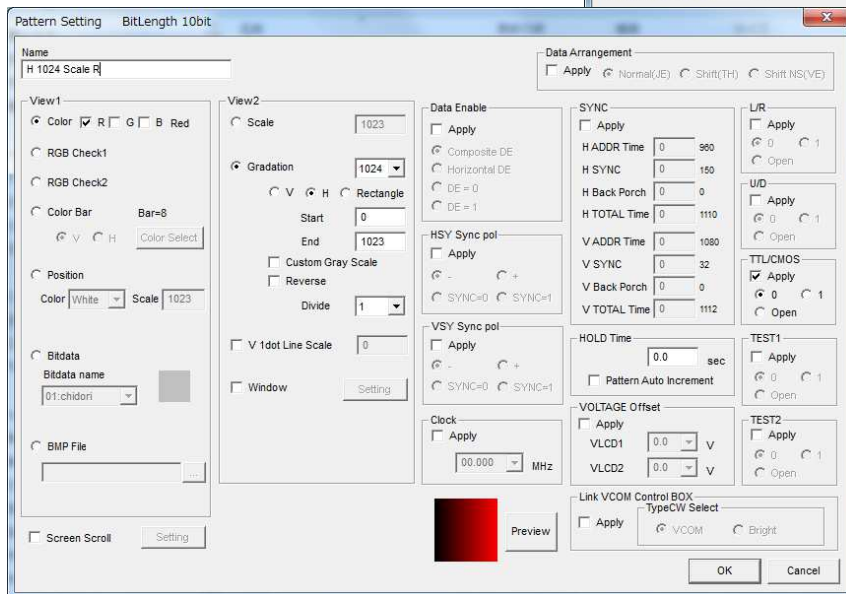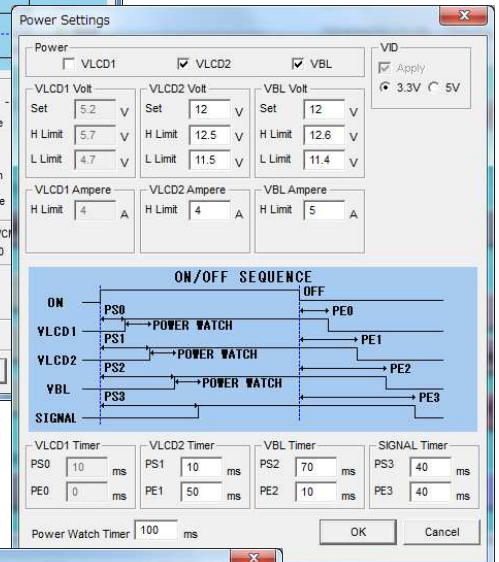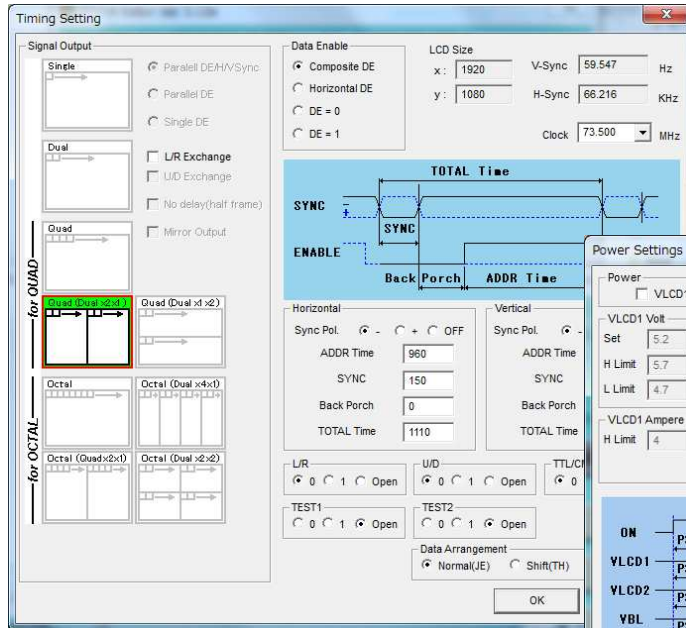

I.S.X Corporation  
〒532-0033  
5-8-20, Niitaka,  
Yodogawa-Ku, Osaka,  
Japan  
TEL 06-4807-6636  
FAX 06-4807-6669  
sales@isx.co.jp

